



CHEM SEALS ENGINEERING PVT. LTD.
AN ISO 9001-2008 COMPANY

Manufacturers & Exporters of Mechanical Shaft Seals & Components

API 682 4th edition Category: 2 & 3 Configurations: 1CW-FL

Mechanical Seals



Piping Plans

API piping plans applicable to
Plan 01
Integral (internal) recirculation
from the pump discharge
seal chamber.



Seals Supply System




Category 2 and 3. 1CW-FL

Seal type A



CS22 EQ. EB. H75VA4-S

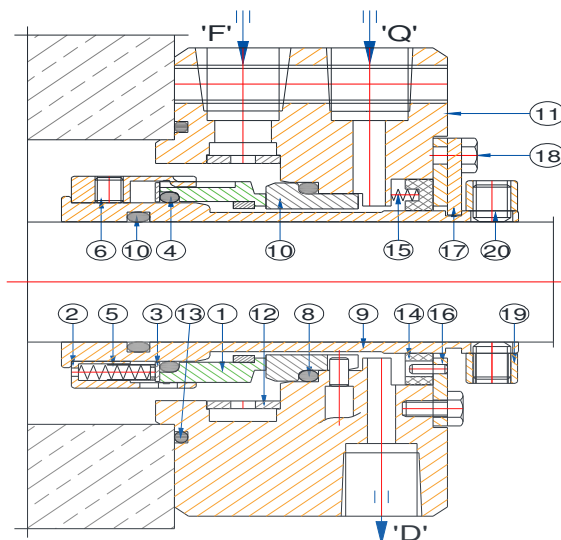

Features:

- API 682 Category 2 and 3, Type A, Arrangement 1 seal
- Single seal
- Balanced
- Cartridge unit
- Rotating multiple springs
- Bi-directional design
- Integrated pumping device available

Advantages:

- Compact design
- Universally applicable both for retrofits or original equipment
- Efficient stock-keeping due to standardized components
- Extended selection of materials
- Extended field of operation in terms of temperature and pressure
- Metal parts also in special materials available

Recommended Applications:

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology
- Highly volatile hydrocarbons
- LPG plants
- API 610/ISO 13709 pumps
- Process pumps

Operating Range:

Shaft diameter: $d = 20 \dots 110 \text{ mm}$ (0.79" ... 4.33")
 Pressure: $p_1 = \dots 42 \text{ bar}$ (609 PSI)
 Temperature: $t = -40 \text{ }^\circ\text{C} \dots +176 \text{ }^\circ\text{C}$ (-40 °F ... +349 °F)*
 Sliding velocity: $v_g = 23 \text{ m/s}$ (75 ft/s)
 Axial movement:
 $d \leq 40 \text{ mm} \pm 1.0 \text{ mm}$
 $d \geq 40 \text{ mm} \pm 1.5 \text{ mm}$
 *Engineered up to 260 °C (500 °F) with FFKM (K) secondary seals.

Materials:

Seal ring: Blister resistant carbon,
 Silicon carbide SSiC (Q1), RBSiC (Q2)
 Mating ring: Silicon carbide SSiC (Q1), RBSiC (Q2)
 Secondary seals: EPDM (E), NBR (P), FKM (V), FFKM (K)
 Springs: HastelloyR C-276 (M5)
 Metal parts: CrNiMo steel 316 (G) or equivalent, optional materials on request.

Recommended Piping Plans:

Process side:
 01, 02, 03, 11, 12, 13, 14, 21, 22, 23, 31, 32, 41
 Atmospheric side: 51, 61, 62, 65A, 65B, 66A, 66B Plans


Item	Description
1	Seal ring
2	Driver
3	Thrust ring
4,8,10,13	O-Ring
5,15	Spring
6,20	Set screw
7	Mating ring
9	Seal sleeve
11	Gland plate
12	Flow distributor
14	Throttle ring
16	Disc
17	Setting device
18	Hexagon bolt
19	Set ring
F	Flush
Q	Quench
D	Drain

Category 2 and 3. 1CW-FL

Seal type A



CS22 EQ. EB. LL9UC

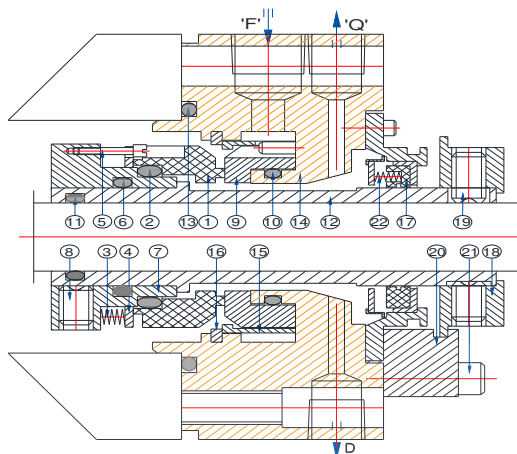

Features:

- API 682 Category 2 and 3, Type A, Arrangement 1 seal
- Single seal
- Balanced
- Cartridge unit
- Rotating multiple springs
- Solid seal faces

Advantages:

- Compact design
- Low heat generation and power consumption due to narrow seal face width
- Longer seal life
- Pressure-balanced design prevents mating ring being forced out under reverse pressure
- No damage to shaft sleeve as dynamic
- O-Ring is not in direct contact with the sleeve
- Extended selection of materials
- Metal parts also in special materials available

Recommended Applications:

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology
- Highly volatile hydrocarbons
- LPG plants
- API 610/ISO 13709 pumps
- Process pumps

Operating Range:

Shaft diameter: $d_1 = 20 \dots 110 \text{ mm}$ (0.79" ... 4.33")
 Pressure: $p = \text{vacuum} \dots 42 \text{ bar}$ (... 609 PSI)
 Temperature: $t = -40 \text{ °C} \dots +176 \text{ °C}$ (-40 °F ... +349 °F)*
 Sliding velocity: $v_g \dots 23 \text{ m/s}$ (... 75 ft/s)
 * Engineered up to 260 °C (500 °F) with FFKM (K)
 secondary seals

Materials:

Seal ring: Blister resistant carbon,
 Silicon carbide SSiC (Q1), RBSiC (Q2)
 Mating ring: Silicon carbide SSiC (Q1), RBSiC (Q2)
 Secondary seals: EPDM (E), NBR (P), FKM (V), FFKM (K)
 Springs: HastelloyR C-276 (M5)
 Metal parts: CrNiMo steel 316 (G)


Recommended Piping Plans:

Process side:
 01, 02, 03, 11, 12, 13, 14, 21, 22, 23, 31, 32, 41
 Atmospheric side: 51, 61, 62, 65A, 65B, 66A, 66B Plans

Item	Description
1	Seal ring
5	Drive screw
4	Thrust ring
2,6,10,11,13	O-Ring
3,22	Spring
7	Collar
8,19	Set screw
9	Mating ring
12	Seal sleeve
14	Gland plate
15	Flow distributor
16	Retaining ring
17	Throttle bushing
18	Drive collar
20	Setting device
21	HSH Cap screw
F	Flush
Q	Quench
D	Drain

Category 2 and 3. 1CW-FL

Seal type A

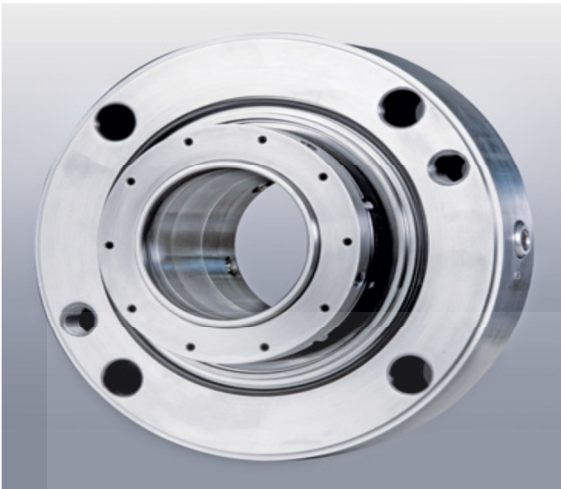

Features:

- API 682 Category 2 and 3, Type A, Arrangement 1 seal
- Single seal
- Balanced
- Cartridge unit
- Rotating multiple springs
- Bi-directional design
- Integrated pumping device available


Advantages:

- Suitable for higher speeds
- Good followability due to no influence from run-out, squareness or vibration of the shaft
- Compact design
- Low heat generation and power consumption due to narrow seal face width
- Longer seal life
- Pressure-balanced design prevents mating ring being forced out under reverse pressure
- No damage to shaft sleeve as dynamic O-Ring is not in direct contact with the sleeve

Recommended Applications:

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology
- Highly volatile hydrocarbons
- LPG plants
- API 610/ISO 13709 pumps
- Process pumps

CS22 EQ. EB. LEK777

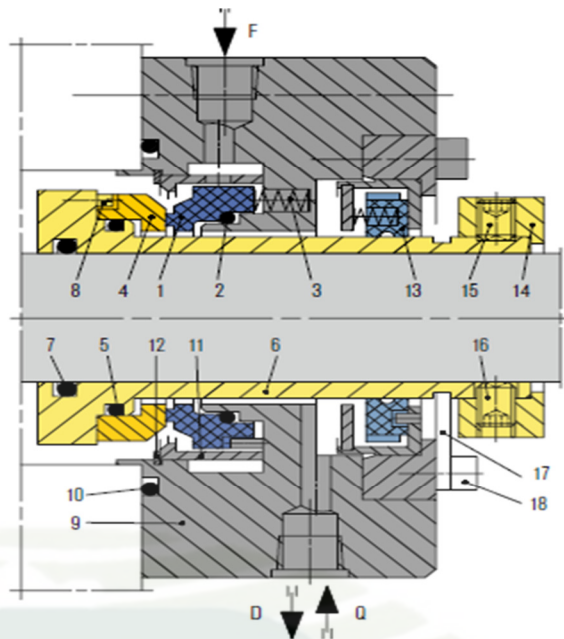

Operating Range:

Shaft diameter: $d_1 = 20 \dots 110 \text{ mm}$ (0.79" \dots 4.33")
 Pressure (product seal): $p = \text{vacuum} \dots 60 \text{ bar}$
 ($\dots 870 \text{ PSI}$)
 Temperature: $-40 \text{ }^\circ\text{C} \dots +176 \text{ }^\circ\text{C}$ ($-40 \text{ }^\circ\text{F} \dots +349 \text{ }^\circ\text{F}$)*
 Sliding velocity: $v_g = 50 \text{ m/s}$ (164 ft/s)
 * Engineered up to $260 \text{ }^\circ\text{C}$ ($500 \text{ }^\circ\text{F}$) with FFKM (K) secondary seals.

Materials:

Seal ring: Blister resistant carbon, Silicon carbide SSiC (Q1), RBSiC (Q2)
 Mating ring: Silicon carbide SSiC (Q1), RBSiC (Q2)
 Secondary seals: EPDM (E), NBR (P), FKM (V), FFKM (K)
 Springs: HastelloyR C-276 (M5)
 Metal parts: CrNiMo steel 316 (G)


Recommended Piping Plans:

Process side:
 01, 02, 03, 11, 12, 13, 14, 21, 22, 23, 31, 32, 41
 Atmospheric side: 51, 61, 62, 65A, 65B, 66A, 66B


Item	Description
1	Seal ring
2,5,7,10	O-Ring
3	Spring
4	Mating ring
6	Seal sleeve
8	Drive screw
9	Gland plate
11	Flow distributor
12	Retaining ring
13	Throttle bushing
14	Drive collar
15,16	Set screw
17	Setting device
18	HSH Cap screw
F	Flush
Q	Quench
D	Drain

Category 2 and 3. 1CW-FL

Seal type A

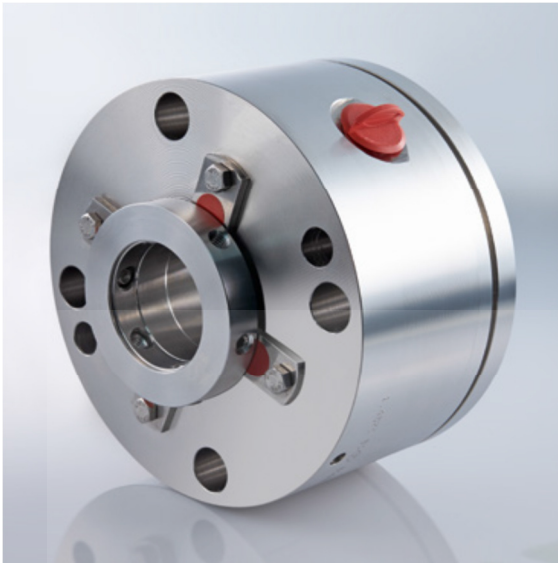

CS22 EQ. EB. SH

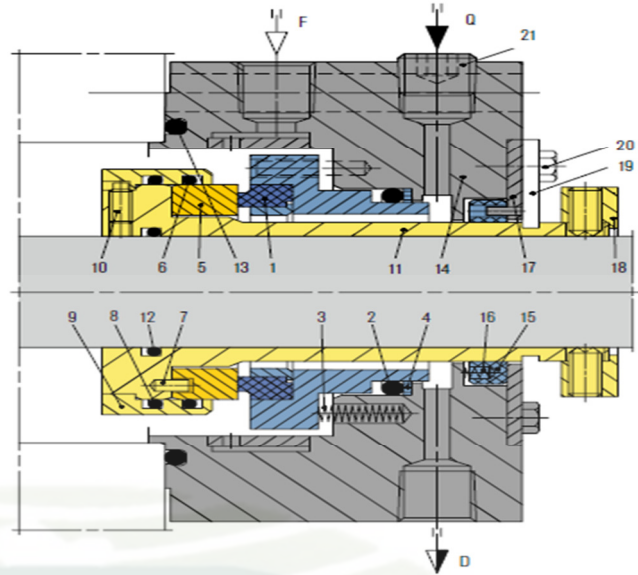

Features:

- API 682 Category 2 and 3, Type A, Arrangement 1 seal
- Single seal
- Balanced
- Cartridge unit
- Stationary multiple springs
- Shrink-fitted seal ring
- Solid mating ring

Advantages:

- Engineered seal for extended requirements
- Deformation-optimized seal for high pressure and high sliding velocity
- Insensitive to shaft deflections due to stationary design
- Version for extreme applications available

Recommended Applications:

- Oil and gas industry
- Refining technology
- Chemical industry
- Hot water
- Sour water
- Caustic soda
- Amines
- Crystallizing media
- Crude oil
- Process water
- Crude oil feed pumps
- Injection pumps
- Multiphase pumps

Operating Range:

Shaft diameter: $d_1 = 40 \dots 110$ (250) mm
(1.57" \dots 4.33 (9.84)")

Pressure: $p_1 = 42$ (150) bar (609 (2,175) PSI)

Temperature: $t = -40$ °C \dots +176 (+200) °C

(-40 °F \dots +350 (+394) °F)

Sliding velocity: $v_g = 23$ (60) m/s (76 (197) ft/s)

Axial movement: ± 3.0 mm

Materials:

Seal ring: Blister resistant carbon,

Silicon carbide SSiC (Q1), RBSiC (Q2, Q3)

Mating ring: Silicon carbide SSiC (Q1), RBSiC (Q2)

Secondary seals: EPDM (E), NBR (P), FKM (V), FFKM (K)

Springs: HastelloyR C-4 (M)* and C-276 (M5)

Metal parts: CrNiMo steel 316 (G) or equivalent, optional materials on request.

* EagleBurgmann standard

Recommended Piping Plans:

Process side:

01, 02, 03, 11, 12, 13, 14, 21, 22, 23, 31, 32, 41

Atmospheric side: 51, 61, 62, 65A, 65B, 66A, 66B.


Item	Description
1	Seal ring
2,5,7,10	O-Ring
3	Spring
4	Mating ring
6	Seal sleeve
8	Drive screw
9	Gland plate
11	Flow distributor
12	Retaining ring
13	Throttle bushing
14	Drive collar
15,16	Set screw
17	Setting device
18	HSH Cap screw
F	Flush
Q	Quench
D	Drain

Category 2 and 3. 1CW-FL

Seal type C



CS22 EQ. EB. LY9TC

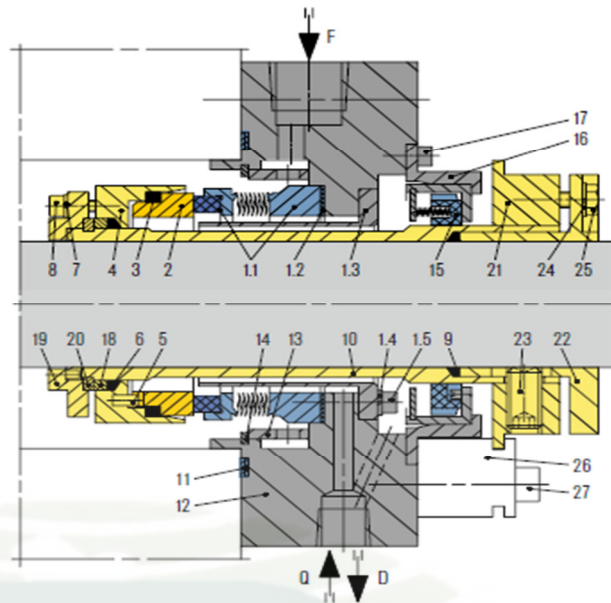

Features:

- API 682 Category 2 and 3, Type C, Arrangement 1 seal
- Single seal
- Balanced
- Cartridge unit
- Stationary metal bellows
- Shrink fitted seal ring and solid mating ring

Advantages:

- Suitable for higher speeds
- Good followability due to no influence from run-out, squareness or vibration of the shaft
- Compact design
- Low heat generation and power consumption due to narrow seal face width
- Longer seal life
- Also available in double ply design
- Suited for applications with extreme high and low temperatures
- Absence of dynamic O-Ring eliminates/reduces seal face hang-up
- Bellows design minimizes variation in face load due to shaft expansion or face wear
- Resistant to abrasive particles in the medium, no shaft or sleeve fretting

Recommended Applications:

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology
- LPG plants
- API 610/ISO 13709 pumps
- Process pumps

Operating Range:

Shaft diameter: $d_1 = 20 \dots 110 \text{ mm}$ (0.79" \dots 4.33")
 Pressure single ply bellows: $p = \text{vacuum} \dots 20 \text{ bar}$
 ($\dots 290 \text{ PSI}$), Pressure two ply bellows: $p = \text{vacuum} \dots 35 \text{ bar}$
 ($\dots 508 \text{ PSI}$)
 Temperature: $t = -130 \text{ }^\circ\text{C} \dots +400 \text{ }^\circ\text{C}$ (-202 $^\circ\text{F} \dots +752 \text{ }^\circ\text{F}$)
 Sliding velocity: $v_g \dots 50 \text{ m/s}$ ($\dots 164 \text{ ft/s}$)

Materials:

Seal ring: Blister resistant carbon, Silicon carbide SSiC (Q1), RBSiC (Q2)
 Mating ring: Silicon carbide SSiC (Q1), RBSiC (Q2)
 Bellows: InconelR 718 (M6)
 Secondary seals: Graphite (G)
 Metal parts: CrNiMo steel 316 (G), CarpenterR 42 (T4)

Recommended Piping Plans:

Process side:
 01, 02, 03, 11, 12, 13, 14, 21, 22, 23, 31, 32, 41
 Atmospheric side: 51, 61, 62, 65A, 65B, 66A, 66B
 Plans


Item	Description
1.1	Seal ring with bellow units
1.2,11	Gasket
1.3	Baffle sleeve
1.4,7,24	Spring washer
1.5,8,17,27	HSB Cap screw
2	Mating ring
3,6,9	Graphite ring
4	Retainer
5	Pin
10	Seal sleeve
12	Gland plate
13	Flow distributor
14	Retaining ring
15	Throttle bushing
16	Adapter
18	Thrust ring
19	Drive ring
20	Split ring
21	Drive collar
22	Clamp sleeve
23	Set screw
25	Hexagon bolt
26	Setting device
F	Flush
Q	Quench
D	Drain

Category 2 and 3. 1CW-FL

Seal type C



CS22 EQ. EB. MBS682

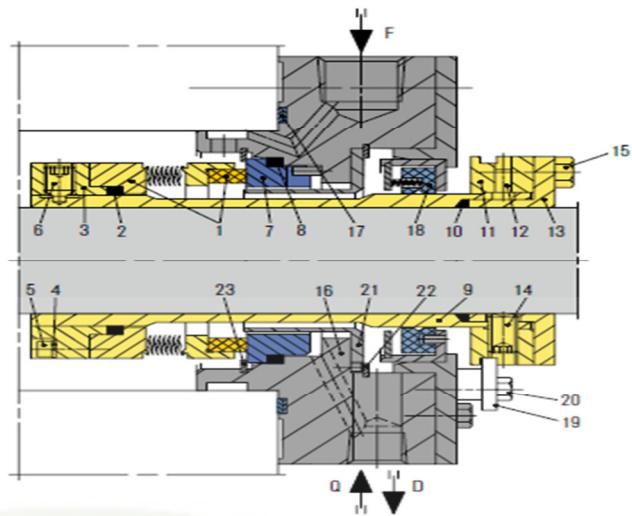

Features:

- API 682 Category 2 and 3, Type C, Arrangement 1 seal
- Single seal
- Balanced
- Cartridge unit
- Rotating metal bellows
- Shrink fitted seal ring and solid mating ring

Advantages:

- Compact design
- Suited for applications with extreme high and low temperatures
- Absence of dynamic O-Ring eliminates/reduces seal face hang-up
- Bellows design minimizes variation in face load due to shaft expansion or face wear
- Resistant to abrasive particles in the medium, no shaft or sleeve fretting
- Also available in double ply design

Recommended Applications:

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology
- LPG plants
- API 610/ISO 13709 pumps
- Process pumps

Operating Range:

Shaft diameter: $d_1 = 20 \dots 110 \text{ mm}$ (0.79" ... 4.33")

Pressure single ply bellows: $p = \text{vacuum} \dots 25 \text{ bar}$ (... 363 PSI)*

Pressure double ply bellows: $p = \text{vacuum} \dots 35 \text{ bar}$ (... 508 PSI)

Temperature: $t = -75 \text{ }^\circ\text{C} \dots +400 \text{ }^\circ\text{C}$ (-103 °F ... +752°F)

Sliding velocity: $v_g \dots 23 \text{ m/s}$ (... 75 ft/s)

* $p > 20 \text{ bar}$ (290 PSI) on request.

Materials:

Seal ring: Blister resistant carbon,

Silicon carbide SSiC (Q1), RBSiC (Q2)

Mating ring: Silicon carbide SSiC (Q1), RBSiC (Q2)

Bellows: InconelR 718 (M6)

Secondary seals: Graphite (G)

Metal parts: CrNiMo steel 316 (G),

CarpenterR 42 (T4)

Recommended Piping Plans:

Process side:

01, 02, 03, 11, 12, 13, 14, 21, 22, 23, 31, 32, 41

Atmospheric side: 51, 61, 62, 65A, 65B, 66A, 66B
Plans


Item	Description
1	Seal ring with bellow units
2,8,10	Graphite ring
3	Collar
4	Spring washer
5	HSH Cap screw
6,14	Set screw
7	Mating ring
9	Seal sleeve
11	Drive collar
12	Pin
13	Clamping sleeve
15,20	Hexagon bolt
16	Gland plate
17	Gasket
18	Throttle bushing
19	Setting device
21	Baffle sleeve
22,23	Retaining ring
F	Flush
Q	Quench
D	Drain

Category 2 and 3. 1CW-FL

Seal type B



CS22 EQ. EB. LY9SA

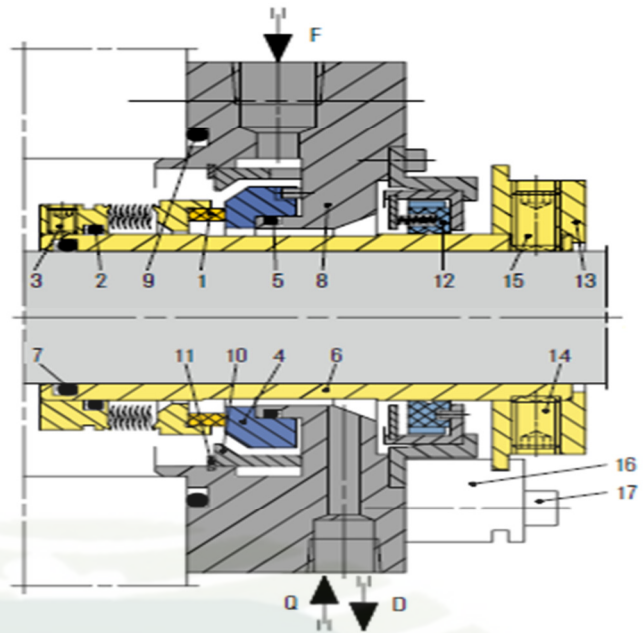

Features:

- API 682 Category 2 and 3, Type B, Arrangement 1 seal
- Single Seal
- Balanced
- Cartridge unit
- Rotating metal bellows
- Shrink fitted seal ring and solid mating ring

Advantages:

- Compact design
- Bellows design allows use of balanced seal with plain sleeve
- Absence of dynamic O-Ring eliminates / reduces seal face hang-up
- Bellows design minimizes variation in face load due to shaft expansion or face wear
- Resistant to abrasive particles in the medium, no shaft or sleeve fretting
- Low heat generation and power consumption due to narrow seal face width
- Longer seal life

Recommended Applications:

- Refining technology Recommended piping plans
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology
- LPG plants
- API 610/ISO 13709 pumps
- Process pumps

Operating Range:

Shaft diameter: $d_1 = 20 \dots 110 \text{ mm (0.79" } \dots \text{ 4.33")}$
 Pressure: $p = \text{vacuum } \dots \text{ 20 bar (290 PSI)}$
 Temperature: $t = -40 \text{ }^\circ\text{C } \dots \text{ +200 }^\circ\text{C (-40 }^\circ\text{F } \dots \text{ +392 }^\circ\text{F)}$
 Sliding velocity: $v_g \dots 23 \text{ m/s (75 ft/s)}$

Materials:

Seal ring: Blister resistant carbon
 Mating ring: Silicon carbide SSiC (Q1), RBSiC (Q2)
 Bellows: HastelloyR C-276 (M5),
 option: InconelR 718 (M6)
 Secondary seals: EPDM (E), NBR (P), FKM (V),
 FFKM (K)
 Metal parts: CrNiMo steel 316 (G), HastelloyR C-276 (M5)

Recommended Piping Plans:

Process side:
 01, 02, 03, 11, 12, 13, 14, 21, 22, 23, 31, 32, 41
 Atmospheric side: 51, 61, 62, 65A, 65B, 66A, 66B
 Plans


Item	Description
1	Seal ring with bellow units
2,5,7,9	O-Ring
3,14,15	Set screw
4	Mating ring
6	Seal sleeve
8	Grand plate
10	Flow distributor
11	Retaining ring
12	Throttle bushing
13	Drive collar
16	Setting device
17	HSH Cap screw
F	Flush
Q	Quench
D	Drain

Category 2 and 3. 1CW-FL

Plans 21 (22), 23, 41



WEF6 Water cooler

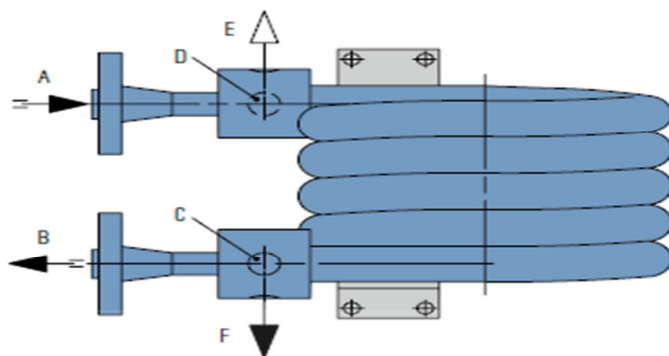

Features:

Heat exchangers of the WEF6000-A4 range are used to cool process/barrier fluids in seal supply circuits. WEF6000-A4 heat exchangers are fully compliant with API 682 4th edition regulations. The process/barrier medium is directed through the tube, and the cooling medium is directed through the shell.

Venting and draining of the process/barrier medium side as well as the cooling water side is ensured. In addition, the heat exchangers can also be combined with a temperature instrument in the supply line to the mechanical seal (optional in accordance with API 682 4th edition).

Advantages:

- Operating limits up to 45 bar/260 °C (653 PSI/500 °F) (tube side): suitable for a wide range of demanding operating conditions.
- Cooling water side and process side can be completely vented and drained
- Seamless pipes on process side
- Special design without welding inside the cooler
- Higher cooling water velocity due to innovative cooler design
- Stainless steel 316L: high resistance to corrosive media

Recommended Applications:

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology

Notes:

Design and production in accordance with EU Pressure Equipment Directive PED 97/23 EC.

Design, calculation and production acc. to ASME VIII, Div. 1

(cooler not subject to ASME stamp requirements, piping <6")

Cleaning: Process/barrier medium side and cooling water side: flush with a suitable solvent.

Item	Description
A	From mechanical seal
B	To mechanical seal
C	Cooling water IN
D	Cooling water OUT
E	Vent
F	Drain

Designation	WEF6100-A4		WEF6100-A4		WEF6000-A4		WEF6000-A4	
	ASME	PED	ASME	PED	ASME	PED	ASME	PED
Type of heat exchanger	Tube	Shell	Tube	Shell	Tube	Shell	Tube	Shell
Process connections	Flange 3/4", 600 lbs	NPT 3/4"	Flange 3/4", 600 lbs	NPT 3/4"	Flange 3/4", 600 lbs	Flange 3/4", 300 lbs	Flange 3/4", 600 lbs	Flange 3/4", 300 lbs
Drain/vent connection	NPT 1/2"		NPT 1/2"		NPT 1/2"		NPT 1/2"	
Allowable pressure ¹⁾	45 bar (653 PSI)	16 bar (232 PSI)	45 bar (653 PSI)	16 bar (232 PSI)	45 bar (653 PSI)	16 bar (232 PSI)	45 bar (653 PSI)	16 bar (232 PSI)
Allowable temperature cooling water side (shell side)	-29 °C ... +150 °C (-20 °F ... +302 °F)		-29 °C ... +150 °C (-20 °F ... +302 °F)		-29 °C ... +150 °C (-20 °F ... +302 °F)		-29 °C ... +150 °C (-20 °F ... +302 °F)	
Allowable temperature process/barrier medium side (tube side) ¹⁾	-29 °C ... +260 °C (-20 °F ... +500 °F)		-29 °C ... +260 °C (-20 °F ... +500 °F)		-29 °C ... +260 °C (-20 °F ... +500 °F)		-29 °C ... +260 °C (-20 °F ... +500 °F)	
Cooling capacity (kW) ²⁾	10		10		10		10	
Cooling capacity (kW) ³⁾	3		3		3		3	
Required cooling water quantity (m ³ /h)	0.6		0.6		0.6		0.6	
Metal parts	316L		316L		316L		316L	

Other versions on request.

1) Design data, permissible working values depend on the actual conditions of service.

2) Guidelines with buffer/barrier fluid water 60 °C (140 °F) – cooling water 20 °C (68 °F).

3) Guidelines with buffer/barrier fluid oil 60 °C (140 °F) - cooling water 20 °C (68 °F).

Category 2 and 3. 1CW-FL

Plans 21 (22), 23, 41



Features:

Heat exchangers of the WEL6000-A4 range (shown here: WEL6002-A4) are used to cool process/barrier fluids in seal supply circuits. The heat exchangers are made of helical, laser welded finned tubes. The cooling medium is ambient air. It is important, therefore, for WEL heat exchangers to be installed in well ventilated places indoors or, ideally, outdoors. There is a choice of three different basic versions of the WEL6000-A4 range as well as supplied fully assembled together with valves, base frame and other system components.


Advantages:

- Operating limits up to 44 bar/260 °C (638 PSI/500 °F) (tube side): suitable for a wide range of demanding operating conditions.
- Can be completely vented and drained
- Seamless pipes
- Stainless steel 316L: high resistance to corrosive media

Recommended Applications:

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology

WEL6 Air cooler

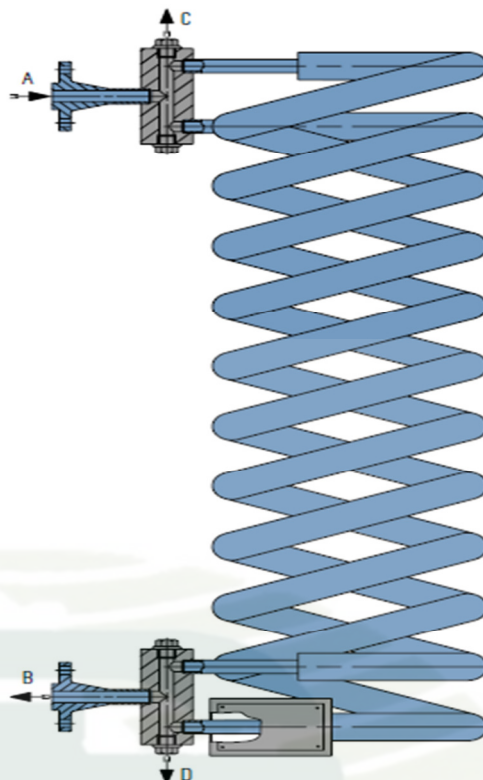

Notes:

Design and production in accordance with EU Pressure Equipment Directive PED 97/23 EC. Design, calculation and production acc. to ASME VIII, Div. 1 (cooler not subject to ASME stamp requirements, piping <6")

Item	Description
A	From mechanical seal
B	To mechanical seal
C	Vent
D	Drain

Designation

	WEL6001-A4A001-D0		WEL6002-A4A001-D0		WEL6003-A4A001-D0	
	ASME	PED	ASME	PED	ASME	PED
Type of heat exchanger	1		2 finned tubes switched in parallel		2 finned tubes switched in parallel and doubled length	
Number of finned tubes	1		2 finned tubes switched in parallel		2 finned tubes switched in parallel and doubled length	
Connections	Flange 3/4", 600 lbs		Flange 3/4", 600 lbs		Flange 3/4", 600 lbs	
Drain/vent connection	Flange 1/2", 600 lbs		Flange 1/2", 600 lbs		Flange 1/2", 600 lbs	
Allowable pressure	44 bar (638 PSI)	44 bar (638 PSI)	44 bar (638 PSI)	44 bar (638 PSI)	44 bar (638 PSI)	44 bar (638 PSI)
Allowable temperature process/barrier medium side (tube side)1)	-29 °C ... +260 °C (-20 °F ... +500 °F)		-29 °C ... +260 °C (-20 °F ... +500 °F)		-29 °C ... +260 °C (-20 °F ... +500 °F)	
Cooling capacity (kW)2)	1.5		2		3	
Cooling capacity (kW)3)	1.2		1.5		2	
Volume (liters)	1.2		2.4		4.8	
Metal parts	316L		316L		316Ls	

Other versions on request:


- 1) Design data, permissible working values depend on the actual conditions of service.
- 2) Guidelines with buffer/barrier fluid water 60 °C (140 °F) - ambient temperature 20 °C (68 °F); moved air at min. 0.7 m/s (2.3 ft/s); product flow rate 8 l/min.
- 3) Guidelines with buffer/barrier fluid oil 60 °C (140 °F) - ambient temperature 20 °C (68 °F); moved air at min. 0.7 m/s (2.3 ft/s); product flow rate 8 l/min.
- 4) Version with screwed connection G1/2" available as an option.

Category 2 and 3. 1CW-FL

Plans 21 (22), 23, 41



SPT6 Temperature indicator

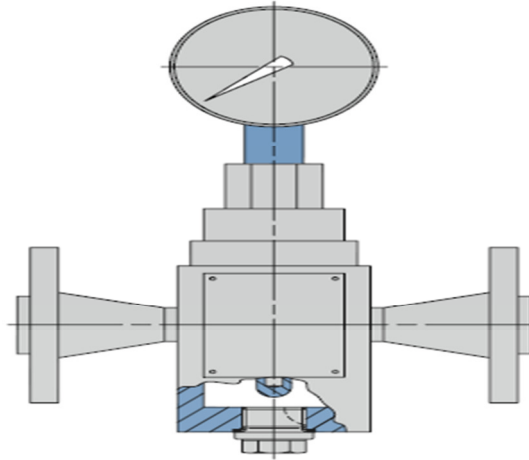

Features:

The measuring unit of the SPT6000-A4 range is used to visually monitor the operating temperature. The measuring unit consists of a bi-metallic temperature gauge (NG100) with protective sleeve installed in a measuring block incl. drain connection.

Advantages:

- Operating limits up to 45 bar/260 °C (653 PSI/500 °F) (design parameters)
- Temperature indicating range up to 200 °C (392 °F)
- Wetted parts: Stainless steel 316L for high resistance to corrosive media

Recommended Applications:

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology

Designation	SPT6000-A4	SPT6000-A4
Connections - process	Flange 3/4", 600 lbs	Flange 3/4", 600 lbs
Connections - drain	G 1/2"	G 1/2"
Allowable pressure	45 bar (653 PSI)	45 bar (653 PSI)
Temperature range	0 °C ... +120 °C (+32 °F ... +248 °F)	0 °C ... +120 °C (+32 °F ... +248 °F)
Wetted parts	316L	316L

Other versions on request:

- 1) Design data, permissible working values depend on the actual conditions of service.

Category 2 and 3. 1CW-FL

Plans 21 (22), 23, 41



Features:

The ZY6000-A4 range is available in three versions:

ZYA6000-A4:

Cyclone separator for high flow rates and high pressures.

ZYB6000-A4:

Cyclone separator for high flow rates and high pressures; 100 % X-ray capability.

ZYC6000-A4:

Cast version, block-type design with integral flanges.

Advantages:

- Contamination is automatically conveyed to the suction nozzle of the pump: maintenance-free mode of operation for guaranteed reliability
- High filtration efficiency
- Wide range of products for the optimum solution for every application
- ZYA6000-A4 and ZYB6000-A4: available for operating pressures of up to 200 bar (2,900 PSI)
- ZYC6000-A4 in block-type design with integrated flange connections: low space requirements because of compact design


Functional description:

Cyclone separators of the ZY6000-A4 range are used to clean mainly aqueous liquids containing contamination such as dirt and solids (e. g., in circulation systems of sewage, sludge or pipeline pumps).

The best possible filtration efficiency is achieved when the specific weight of the solids is much higher than that of the carrier liquid and when the differential pressure is as large as possible within the permissible pressure range (min. 1.7 bar (24.7 PSI) in accordance with API 682).

The viscosity of the medium is a factor that also needs to be taken into account.


ZYA6 Cyclone separator

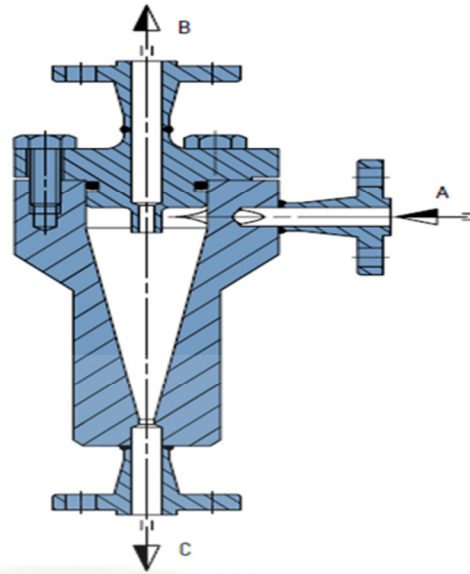

Recommended Applications:

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology

Installation:

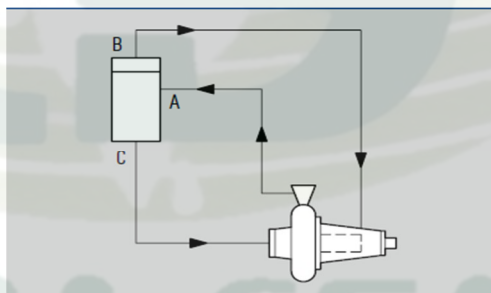

P&ID for ZY6000-A4 Cyclone separators

- A - Contaminated liquid IN
- B - Clean liquid OUT
- C - Separated liquid OUT

Designation	ZYA6000	ZYB6000	ZYC6000
Features	Standard	100 % X-ray capability	Cast version
Connections - product inlet	Flange 3/4", 600 lbs	Flange 3/4", 600 lbs	Integral flange 3/4", 600 lbs
Connections - clean product outlet	Flange 3/4", 600 lbs	Flange 3/4", 600 lbs	Integral flange 3/4", 600 lbs
Connections - contaminated product outlet	Flange 3/4", 600 lbs	Flange 3/4", 600 lbs	Integral flange 3/4", 600 lbs
Allowable pressure	60 bar (870 PSI)	60 bar (870 PSI)	60 bar (870 PSI)
Temperature range	-29 °C ... +150 °C (-20 °F ... +302 °F)	-29 °C ... +150 °C (-20 °F ... +302 °F)	-29 °C ... +150 °C (-20 °F ... +302 °F)
O-Ring	Viton	Viton	Viton
Wetted parts	316L	316L	316L

Other versions on request:


- 1) Max. permissible working values depend on version.
- 2) Other materials on request, e. g. FKM, EPDM

Category 2 and 3. 1CW-FL

Plans 66A, 66B



SPP6 Leakage detection system

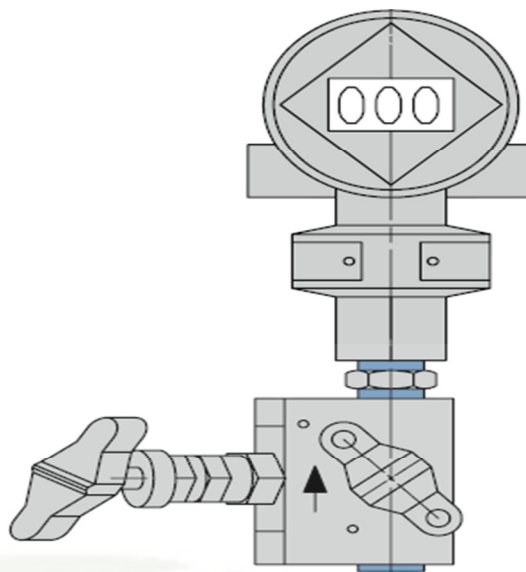

Features:

The EagleBurgmann leakage control systems of the SPP6006-A4 range consist of a pressure transmitter which is supplied together with a block and bleed valve.

Advantages:

- Compact design
- Easy to integrate in existing piping systems.

Recommended Applications:

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology

Functional description:

The SPP6006-A4 leakage control system is used to detect leakage from single seals. In case of a seal failure, the SPP6006-A4 is required to monitor excessive leakage. If the seal leakage exceeds a certain value, the bushing/orifice will limit the amount of leakage leaving the seal gland. Consequently the pressure will increase on the upstream side of the inner bushing. The pressure is monitored by means of the transmitter which will provide information about seal performance and seal failure.

Product variants

Designation	SPP6006-A4	SPP6006-A4
Process connections	1/2" NPT	1/2" NPT
Pressure range	0 - 55 bar (0 - 798 PSI)	0 - 55 bar (0 - 798 PSI)
Calibration range ¹⁾	0 - 16 bar (0 - 232 PSI)	0 - 40 bar (0 - 580 PSI)
Allowable temperature ¹⁾	0 °C ... +120 °C (+32 °F ... +248 °F)	-29 °C ... +120 °C (-20 °F ... +248 °F)
Wetted parts	316L	316L

Other versions on request:


- 1) Design data, permissible working values depend on the actual conditions of service.

Category 2 and 3. 1CW-FL

Plans 32



SPX6 Flush unit

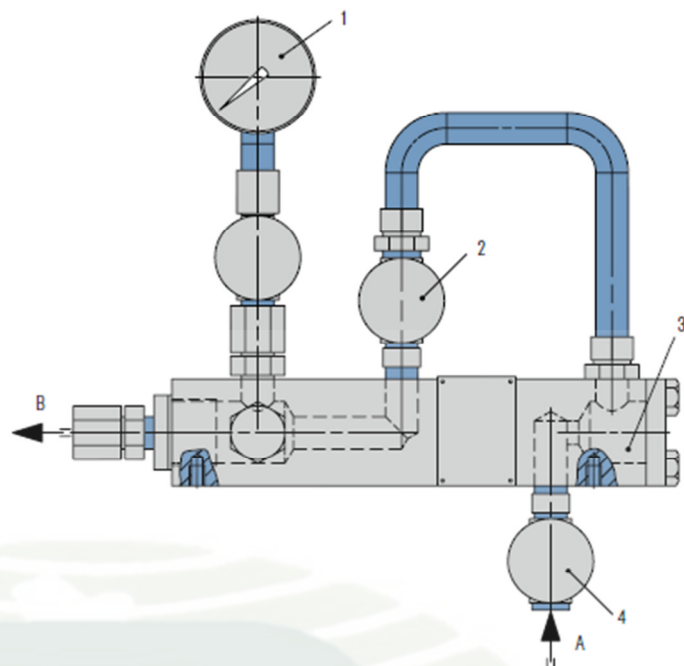

Features:

The EagleBurgmann leakage control systems of the SPP6006-A4 range consist of a pressure transmitter which is supplied together with a block and bleed valve.

Advantages:

- Compact design
- Easy to integrate in existing piping systems.

Recommended Applications:

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology

Functional description:

The SPP6006-A4 leakage control system is used to detect leakage from single seals. In case of a seal failure, the SPP6006-A4 is required to monitor excessive leakage. If the seal leakage exceeds a certain value, the bushing/orifice will limit the amount of leakage leaving the seal gland. Consequently the pressure will increase on the upstream side of the inner bushing. The pressure is monitored by means of the transmitter which will provide information about seal performance and seal failure.

Item	Description
1	Pressure indicator
2	Needle valve
3	Integral filter
4	Valve
A	From external source
B	To mechanical seal

Designation

SPP6006-A4

Process connections

1/2" NPT

Allowable pressure

44 bar (638 PSI)

Allowable temperature

0 °C ... +120 °C
(+32 °F ... +248 °F)

Wetted parts

316L


Other versions on request:

- 1) Design data, permissible working values depend on the actual conditions of service.

Category 2 and 3. 1CW-FL

Plans 51

SPX6 Flush unit

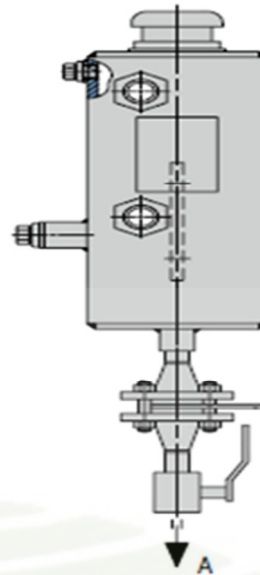

Features:

Quench fluid supply systems are used with single mechanical seals. They act as a convenient fluid reservoir. The QFT6000-A4 stainless steel tank is equipped with a sight glass for monitoring the MIN/MAX filling level and can be fastened with a lug fixture.

Advantages:

- Sight-glass for MIN/MAX monitoring has a large indicator area
- Filling is possible via a filling filter or a separate pipe connection
- Combined filling and ventilation filter in the quench fluid tank for reliable operation
- Tank made of 1.4571: high resistance to corrosive media

Recommended Applications:


- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology

Functional description:

- Quench fluid systems (Plan 51) are employed to:
 - Absorb leakage
 - Monitor the leakage rate (e. g., through periodic reading of the level in the tank)
 - Prevent icing
 - Protect against dry running
 - Stabilize the lubricating film
 - Exclude air from the media in order to prevent a reaction with oxygen in the air.

Item	Description
A	To mechanical seal

Installation:

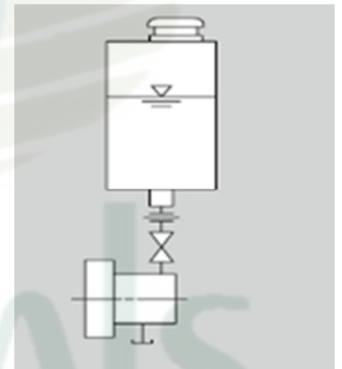

Designation	QFT6000/M001-D0
Pressure Equipment Directive	N/A
Volume, vessel (litres)	3
Allowable pressure	Pressure less
Allowable temperature system1)	-29 °C ... +100 °C (-20 °F ... +212 °F)
Metal parts (tank)	316Ti
Filling filter	Glass-fibre-reinforced polyamide
Sight-glass	Glass
Gasket	FKM


Other versions on request:

1) Design data, permissible working values depend on the actual conditions of service.

Category 2 and 3. 1CW-FL

Plans 65A

LSA6 Leakage collection reservoir

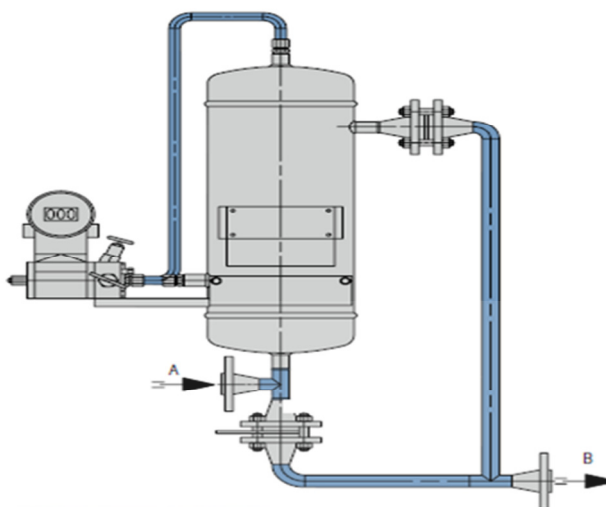

Features:

Quench fluid supply systems are used with single mechanical seals. They act as a convenient fluid reservoir. The QFT6000-A4 stainless steel tank is equipped with a sight glass for monitoring the MIN/MAX filling level and can be fastened with a lug fixture.

Advantages:

- Sight-glass for MIN/MAX monitoring has a large indicator area
- Filling is possible via a filling filter or a separate pipe connection
- Combined filling and ventilation filter in the quench fluid tank for reliable operation
- Tank made of 1.4571: high resistance to corrosive media

Recommended Applications:

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology


Functional description:

In accordance with API Plan 65A, the LSA6000 leakage control system is used to discharge leakage from single seals. The outboard leakage is collected in an external tank; the leakage volume is monitored (level in the tank).

Notes:

Design and production available in accordance with EU Pressure Equipment Directive PED 97/23 EC. Design, calculation and production available acc. to ASME VIII, Div. 1. 3rd party inspection, ASME stamp on request.

Installation:

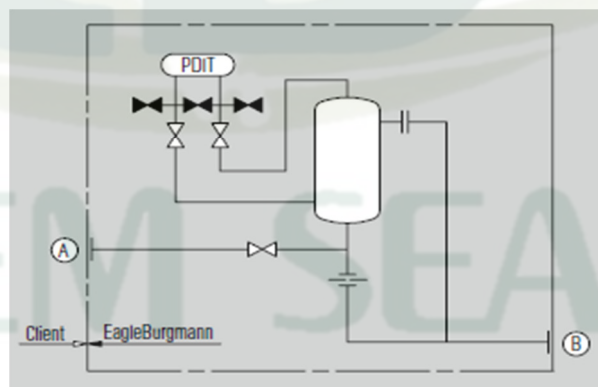

P&ID for LSA6000 -A4 Leakage collection system

A - From mechanical seal
B - To leakage collection system

Designation	LSA6000-A4
Pressure Equipment Directive	PED ASME
Volume of vessel (liters)	4
Allowable pressure	44 bar (638 PSI)
Allowable temperature	-29 °C ... +120 °C (-20 °F ... +248 °F)
Connection	Flange 3/4", 600 lbs.
Metal parts	316L


Other versions on request:

- 1) Design data, permissible working values depend on the actual conditions of service.

Category 2 and 3. 1CW-FL

Plans 65B

LSB6 Leakage collection reservoir

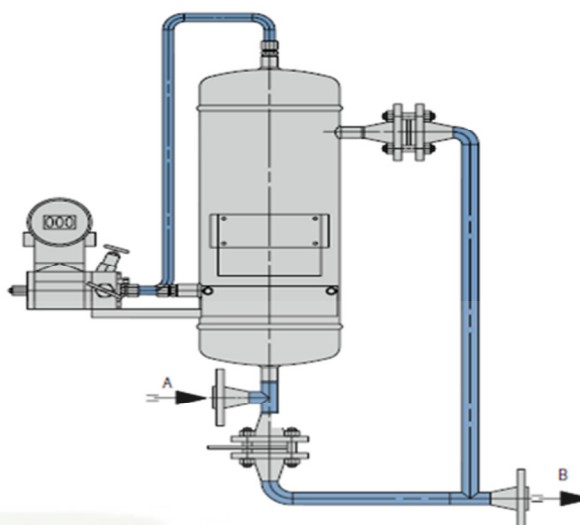

Features:

In accordance with API Plan 65B, the EagleBurgmann leakage control systems of the LSB6000 range consist of a leakage collection tank with valve and overflow pipe.

The level can be monitored with the differential pressure transmitter which is supplied together with a five-way manifold valve.

Advantages:

- Seal failure detection
- Safe discarding of excessive seal leakage
- To ensure durability, all components are corrosion resistant
- Resistant.

Recommended Applications:

- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology


Functional description:

In accordance with API Plan 65B, the LSB6000 leakage control system is used to discharge leakage from single seals. The outboard leakage is collected in an external tank; the leakage volume is monitored (level in the tank).

Notes:

Design and production available in accordance with EU Pressure Equipment Directive PED 97/23 EC. Design, calculation and production available acc. to ASME VIII, Div. 1. 3rd party inspection, ASME stamp on request.

Installation:

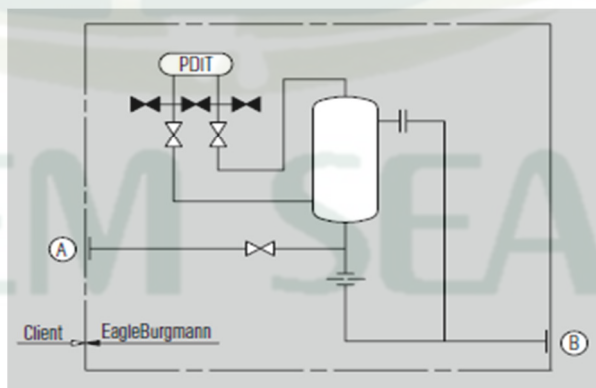

P&ID for LSB60000 -A4 Leakage collection system

A - From mechanical seal
B - To leakage collection system

Designation	LSB6000-A4
Pressure Equipment Directive	PED ASME
Volume of vessel (litres)	4
Allowable pressure ¹⁾	44 bar (638 PSI)
Allowable temperature ¹⁾	-29 °C ... +120 °C (-20 °F ... +248 °F)
Connection	Flange 3/4", 600 lbs.
Metal parts	316L

Other versions on request:

1) Design data, permissible working values depend on the actual conditions of service.