

Type: CS 4

Features:


- Single Seal
- Unbalanced
- Conical spring
- Dependent on direction of rotation

Applications :

It is used for process industry, Water pumps Low solids contents media, Submersible pumps etc.

Operating Conditions:

- Temperature : -20°C to +180°C
- Pressure : 10 bar g
- Speed : 15 m/s

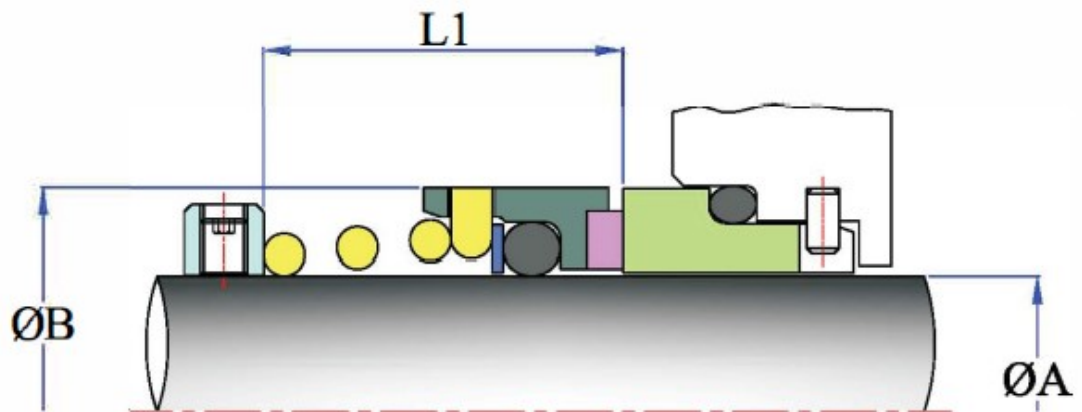

A	B	L ₁
10	19	15.5
12	21	16.0
14	23	16.5
16	26	18.0
18	29	19.5
20	31	22.0
22	33	21.5
24	35	23.5
25	36	26.5
28	40	26.5
30	43	26.5
32	46	28.5
33	47	28.5
35	49	28.5
38	53	33.5
40	56	36.0
43	59	38.5
45	61	39.5
48	64	46.0
50	66	45.0
53	69	47.0
55	71	49.0
58	76	55.0
60	78	55.0
63	83	55.0
65	84	55.0

63	83	55.0
65	84	55.0
68	88	55.0
70	90	57.0
75	98	62.0
80	100	61.8