

Type: CS 5

Features :

- Bi-directional
- Reverse Balance
- Externally mounted
- Resistant to acids & Basic


Applications:

It is used with corrosive liquids at low and medium pressures. In the basic versions it doesn't present parts in contact with the product.



Operating Condition:

- Temperature : -45°C to +140°C
- Pressure : up to 15 bar g
- Speed : 10 m/s

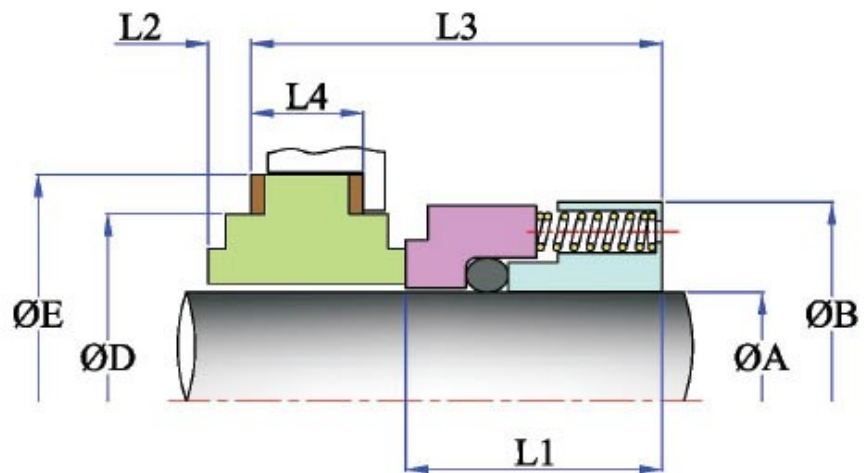

A	B	D	E	I ₁	L ₂	L ₃	L ₄
20	40	39	50	22	8.5	41.5	10.3
22	42	44	55	22	8.5	41.5	10.3
24	44	46	57	22	8.5	41.5	10.3
25	47	47	58	24	8.5	43.5	10.3
28	50	50	61	24	8.5	43.5	10.3
30	52	52	63	24	8.5	45.5	12.3
32	54	54	65	24	8.5	45.5	12.3
33	55	55	66	24	8.5	45.5	12.3
35	57	57	68	24	8.5	45.5	12.3
38	65	63	74	29	9.5	51.5	13.1
40	67	65	76	29	9.5	51.5	13.1
42	69	67	78	29	9.5	51.5	13.1
43	70	68	79	29	9.5	51.5	13.1
45	72	70	81	29	9.5	51.5	13.1
48	75	73	84	29	9.5	51.5	13.1
50	77	76	89	29	9.5	51.5	13.1
53	80	79	92	29	9.5	51.5	13.1
55	82	81	94	29	9.5	51.5	13.1
58	85	84	97	29	9.5	51.5	13.1
60	87	86	99	29	9.5	51.5	13.1
63	90	89	102	29	9.5	51.5	13.1
65	92	91	104	29	9.5	51.5	13.1
68	95	94	107	29	9.5	51.5	13.1
70	97	96	109	29	9.5	51.5	13.1

65	92	91	104	29	9.5	51.5	13.1
68	95	94	107	29	9.5	51.5	13.1
70	97	96	109	29	9.5	51.5	13.1
75	102	101	114	29	9.5	51.5	13.1
80	112,5	111	124	31	9.5	53.5	13.1
85	117,5	116	129	31	9.5	53.5	13.1
90	122,5	121	134	31	9.5	53,5	13.1
95	127,5	126	139	31	9.5	53.5	13.1
100	132,5	131	144	31	9.5	53.5	13.1