

# Non Contact Spring : - Type: CS 23

## Features:

- Single seal
- Balanced
- Independent of direction of rotation
- Encapsulated rotating spring


## Application:

Sugar industry, Pulp and paper industry, water and waste technology  
 Dirty, abrasive and solid containing media, Raw sludge , sewage slurries etc.



## Operating Condition:

- Temperature : -50°C to +180°C
- Pressure : 25 bar
- Speed : 20 m/s

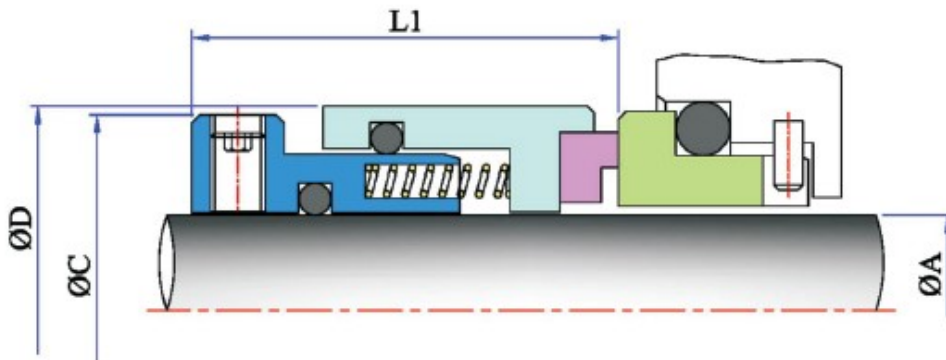

Seal Size ØA	ØD	L1
18	32	30.5
20	34	30.5
22	36	30.5
24	38	33.0
25	39	33.0
28	42	35.5
30	44	35.5
32	47	35.5
33	47	35.5
35	49	35.5
38	54	37.0
40	56	37.0
43	59	37.0
45	61	37.0
48	64	37.0
50	66	38.0
53	69	38.0
55	71	38.0
58	78	42.0
60	80	42.0
63	83	42.0
65	85	42.0
68	88	41.5
70	90	48.5
75	99	48.5
80	104	48.5

70	90	48.5
75	99	48.5
80	104	48.5
85	109	48.5
90	114	52.0
95	119	52.0
100	124	52.0