

Type: CS 20

Features:

- Single seal
- Balanced
- Suitable for extremely corrosive liquids at low pressures
Seal with multiple springs
- Outside mounted

Application:


It is used for extremely corrosive chemicals, including concentrated acids and salts, strong oxidising and reducing agents and chemically active organic compounds.

Glass filled PTFE face composite moulded with flexible PTFE bellow



Operating Condition:

- Temperature : -20°C to +120°C
- Pressure : up to 6 bar g
- Speed : 20 m/s

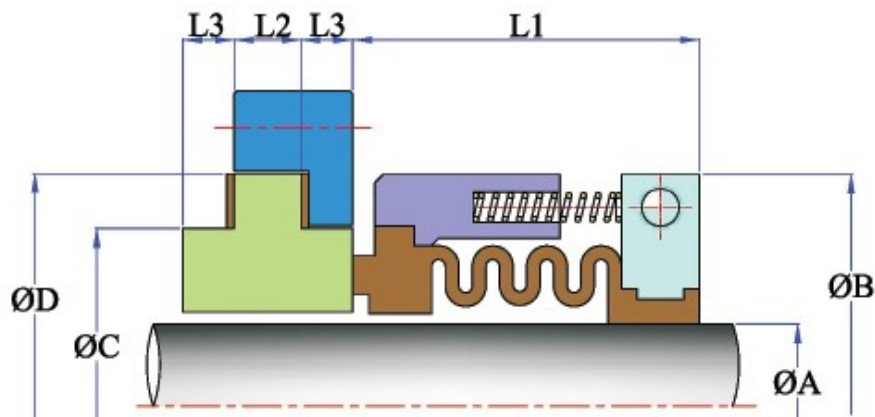

Seal Size (inches)	ØA	ØB	L1	ØC	ØD	L2	L3
1.000	25.40	61	33	54	42.86	8.0	4.8
1.125	28.57	67	36	65	50.80	11.0	8.0
1.250	31.75	70	37	68	53.98	11.0	8.0
1.375	34.92	73	38	71	57.15	11.0	8.0
1.500	38.10	76	38	78	63.50	11.0	8.0
1.625	41.27	80	40	81	66.68	11.0	8.0
1.750	44.45	83	40	84	69.85	11.0	8.0
1.875	47.62	86	43	87	73.03	11.0	8.0
2.000	50.80	89	43	97	79.38	14.3	9.5
2.123	53.97	103	53	100	82.55	14.3	9.5
2.250	57.15	107	53	103	85.73	14.3	9.5
2.375	60.32	110	53	106	88.90	14.3	9.5
2.500	63.50	113	53	110	92.08	14.3	9.5
2.625	66.67	116	53	113	95.25	14.3	9.5
2.750	69.85	118	53	116	98.43	14.3	9.5
2.875	73.02	122	53	117	100.01	14.3	9.5

2.625	66.67	116	53	113	95.25	14.3	9.5
2.750	69.85	118	53	116	98.43	14.3	9.5
2.875	73.02	122	53	117	100.01	14.3	9.5
3.000	76.20	126	53	121	103.19	14.3	9.5
3.250	82.55	150	73	132	114.30	14.3	9.5
3.500	88.90	156	73	138	120.65	14.3	9.5
3.750	95.25	163	73	144	127.00	14.3	9.5
4.000	101.60	169	73	151	133.35	14.3	9.5

Type: CS 20 R

Features:

- Single seal
- Balanced
- Suitable for extremely corrosive liquids at low pressures
Seal with multiple springs
- Outside mounted
- Replaceable Face

Application:


It is used for extremely corrosive chemicals, including concentrated acids and salts, strong oxidising and reducing agents and chemically active organic compounds.

Replaceable sealing faces drive by integral lugs on bellows.



Operating Condition:

- Temperature : -20°C to +120°C
- Pressure : up to 6 bar g
- Speed : 20 m/s

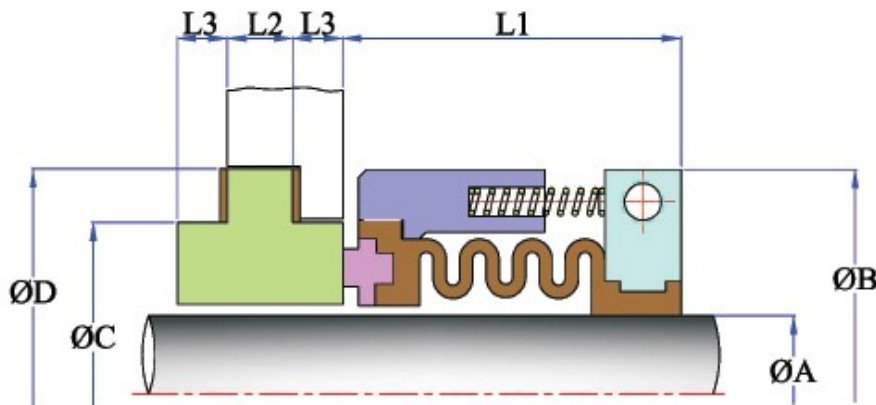

Seal Size (inches)	ØA	ØB	L1	ØC	ØD	L2	L3
1.000	25.40	61	33	54	42.86	8.0	4.8
1.125	28.57	67	36	65	50.80	11.0	8.0
1.250	31.75	70	37	68	53.98	11.0	8.0
1.375	34.92	73	38	71	57.15	11.0	8.0
1.500	38.10	76	38	78	63.50	11.0	8.0
1.625	41.27	80	40	81	66.68	11.0	8.0
1.750	44.45	83	40	84	69.85	11.0	8.0
1.875	47.62	86	43	87	73.03	11.0	8.0
2.000	50.80	89	43	97	79.38	14.3	9.5
2.123	53.97	103	53	100	82.55	14.3	9.5

1.875	47.62	86	43	87	73.03	11.0	8.0
2.000	50.80	89	43	97	79.38	14.3	9.5
2.123	53.97	103	53	100	82.55	14.3	9.5
2.250	57.15	107	53	103	85.73	14.3	9.5
2.375	60.32	110	53	106	88.90	14.3	9.5
2.500	63.50	113	53	110	92.08	14.3	9.5
2.625	66.67	116	53	113	95.25	14.3	9.5
2.750	69.85	118	53	116	98.43	14.3	9.5
2.875	73.02	122	53	117	100.01	14.3	9.5
3.000	76.20	126	53	121	103.19	14.3	9.5
3.250	82.55	150	73	132	114.30	14.3	9.5
3.500	88.90	156	73	138	120.65	14.3	9.5
3.750	95.25	163	73	144	127.00	14.3	9.5
4.000	101.60	169	73	151	133.35	14.3	9.5